


TF




Precision ground chipbreaker for nickel alloys. Good for feeds up to 0.009"/rev and depths to 0.030".

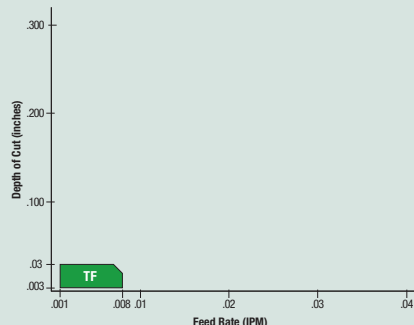


FF and FF2




For finishing all types of material. Designed for feeds up to 0.0185"/rev and 0.150" depth of cut.

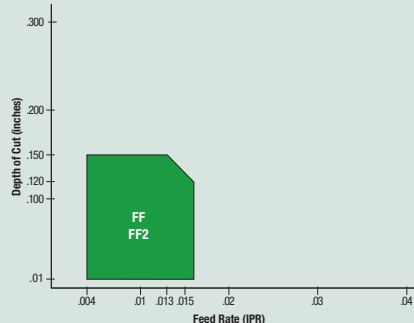

GP and GP2




General purpose chipbreaker. Feed rates up to 0.02"/rev and 0.35" depth of cut.

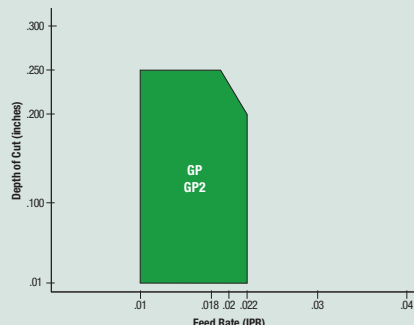

MR and MR2



Used for medium roughing of all material. Feeds up to 0.028"/rev and depths up to 0.50".

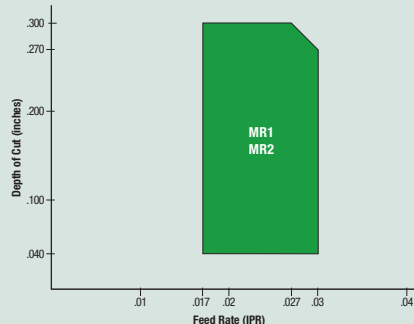

HR



Heavy roughing for all materials. Feeds above 0.023"/rev. One-sided chipbreaker for heaviest feeds (MM).
 Example: CNMM 644 HR

